

Aluminium-Steigleitern Typ ALO 490

Aluminium vertical ladders type ALO 490

DE

Anwendung:

- Als ortsfeste Steigleitern an Gebäuden und maschinellen Anlagen
- Für den Innen- und Außenbereich geeignet

Eigenschaften:

- Leiterteile können ohne Korrosionsrisiko gekürzt werden
- korrosionsbeständig in neutraler und leicht saurer Umgebung
- rutschsichere Sprossen durch Quer- und Längsprofilierung
- stabile, handfreundliche Holmprofile
- verlängerbar mittels Leiterverbinder
- einfache Montage
- geringes Gewicht

Lieferumfang:

Nur Leiterteile, ohne Zubehör

GB

Application:

- As fixed vertical ladders for buildings and machinery
- Suitable for indoor and outdoor use




Features:

- Ladder sections can be shortened without risk of corrosion
- Resistant to corrosion in neutral and slightly acidic environments
- Non-slip rungs with crosswise and lengthwise profiling
- Sturdy, easy-grip rail profiles
- Extendable using ladder connectors
- Easy to install
- Low weight

Scope of delivery:

Only ladders, without any accessories

AL

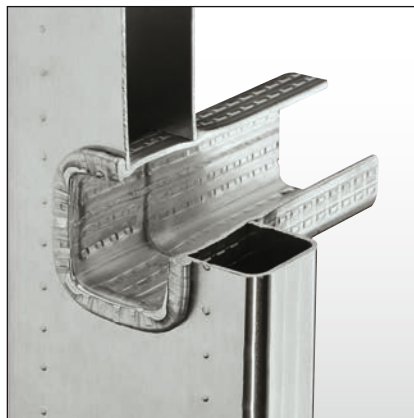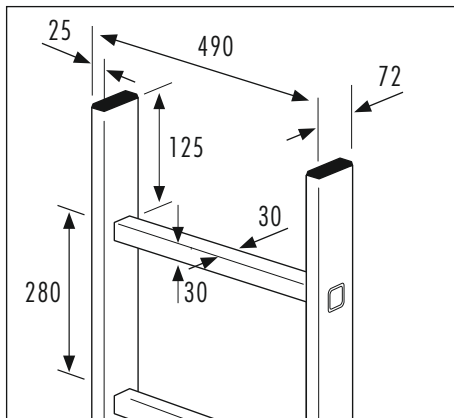

Aluminium-Steigleitern Typ ALO 490

Aluminium vertical ladders type ALO 490

Material:
Aluminium

Oberfläche: ALUNAT, natur
Surface: ALUNAT, uncoated

Artikel-Nr. Item no.	Typ Type					 4007126 ...
6050021	ALO 490-02	2	560	Stück · piece	1,0	605009
6050031	ALO 490-03	3	840	Stück · piece	1,5	605016
6050041	ALO 490-04	4	1120	Stück · piece	2,0	605023
6050051	ALO 490-05	5	1400	Stück · piece	2,6	605030
6050061	ALO 490-06	6	1680	Stück · piece	3,0	605047
6050071	ALO 490-07	7	1960	Stück · piece	3,5	605054
6050081	ALO 490-08	8	2240	Stück · piece	4,1	605061
6050091	ALO 490-09	9	2520	Stück · piece	4,6	605078
6050101	ALO 490-10	10	2800	Stück · piece	5,2	605085
6050111	ALO 490-11	11	3080	Stück · piece	5,5	605092
6050121	ALO 490-12	12	3360	Stück · piece	6,1	605108
6050131	ALO 490-13	13	3640	Stück · piece	6,7	605115
6050141	ALO 490-14	14	3920	Stück · piece	7,2	605122
6050151	ALO 490-15	15	4200	Stück · piece	7,6	605139

Stahl-Steigleitern Typ STO 490

Steel vertical ladders type STO 490

DE

Anwendung:

- Als ortsfeste Steigleitern an Gebäuden und maschinellen Anlagen
- Für den Innen- und Außenbereich geeignet

Eigenschaften:

- Leiterteile können gekürzt werden, müssen jedoch **fachgerecht** nachverzinkt werden
- korrosionsbeständig in neutraler und leicht saurer Umgebung
- rutschsichere Sprossen durch Sicherheitslochung
- stabile, handfreundliche Holmprofile
- verlängerbar mittels Leiterrverbinden
- einfache Montage

Lieferumfang:

Nur Leiterteile, ohne Zubehör

GB

Application:



- As fixed vertical ladders for buildings and machinery
- Suitable for indoor and outdoor use

Features:

- Ladder sections may be shortened, but must be **properly** post-galvanized
- Resistant to corrosion in neutral and slightly acidic environments
- Safety perforation ensures non-slip rungs
- Sturdy, easy-grip rail profiles
- Extendable using ladder connectors
- Easy to install

Scope of delivery:

Only ladders, without any accessories

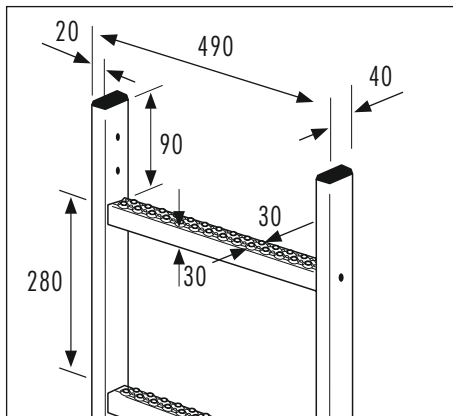

Stahl-Steigleitern Typ STO 490

Steel vertical ladders type STO 490

Material:
Stahl / Steel 1.0037/ASTM A36

Oberfläche: feuerverzinkt
Surface: hot dip galvanized

Artikel-Nr. Item no.	Typ Type					 4007126 ...
9647021	STO 490-02	2	560	Stück · piece	2,4	964700
9647031	STO 490-03	3	840	Stück · piece	3,6	964717
9647041	STO 490-04	4	1120	Stück · piece	4,8	964724
9647051	STO 490-05	5	1400	Stück · piece	6,0	964731
9647061	STO 490-06	6	1680	Stück · piece	7,2	964748
9647071	STO 490-07	7	1960	Stück · piece	8,4	964755
9647081	STO 490-08	8	2240	Stück · piece	9,6	964762
9647091	STO 490-09	9	2520	Stück · piece	10,8	964779
9647101	STO 490-10	10	2800	Stück · piece	12,0	964786
9647111	STO 490-11	11	3080	Stück · piece	13,2	964793
9647121	STO 490-12	12	3360	Stück · piece	14,4	964809
9647131	STO 490-13	13	3640	Stück · piece	15,6	964816
9647141	STO 490-14	14	3920	Stück · piece	16,8	964823
9647151	STO 490-15	15	4200	Stück · piece	18,0	964830

Edelstahl-Steigleitern VAO 490

Stainless steel vertical ladders VAO 490

DE

Anwendung:

- Als ortsfeste Steigleitern an Gebäuden und maschinellen Anlagen
- Für den Innen- und Außenbereich geeignet

Eigenschaften:

- Leiterteile können ohne Korrosionsrisiko gekürzt werden
- korrosionsbeständig in neutraler und leicht saurer Umgebung
- rutschsichere Sprossen durch Sicherheitslochung
- stabile, handfreundliche Holmprofile
- verlängerbar mittels Leiterverbinder
- einfache Montage

Lieferumfang:

Nur Leiterteile, ohne Zubehör

GB

Application:





- As fixed vertical ladders for buildings and machinery
- Suitable for indoor and outdoor use

Features:

- Ladder sections can be shortened without risk of corrosion
- Resistant to corrosion in neutral and slightly acidic environments
- Safety perforation ensures non-slip rungs
- Sturdy, easy-grip rail profiles
- Extendable using ladder connectors
- Easy to install

Scope of delivery:

Only ladders, without any accessories

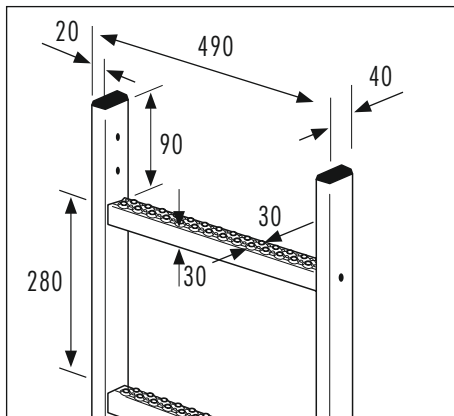

Edelstahl-Steigleitern VAO 490

Stainless steel vertical ladders VAO 490

Material:
Edelstahl / *Stainless steel*
1.4301 / ASTM 304

Oberfläche: gebeizt und passiviert
Surface: pickled and passivated

Artikel-Nr. <i>Item no.</i>	Typ <i>Type</i>		 mm		 kg	 4007126 ...
9652021	VAO 490-02	2	560	Stück · <i>piece</i>	2,4	965202
9652031	VAO 490-03	3	840	Stück · <i>piece</i>	3,6	965219
9652041	VAO 490-04	4	1120	Stück · <i>piece</i>	4,8	965226
9652051	VAO 490-05	5	1400	Stück · <i>piece</i>	6,0	965233
9652061	VAO 490-06	6	1680	Stück · <i>piece</i>	7,2	965240
9652071	VAO 490-07	7	1960	Stück · <i>piece</i>	8,4	965257
9652081	VAO 490-08	8	2240	Stück · <i>piece</i>	9,6	965264
9652091	VAO 490-09	9	2520	Stück · <i>piece</i>	10,8	965271
9652101	VAO 490-10	10	2800	Stück · <i>piece</i>	12,0	965288
9652111	VAO 490-11	11	3080	Stück · <i>piece</i>	13,2	965295
9652121	VAO 490-12	12	3360	Stück · <i>piece</i>	14,4	965301
9652131	VAO 490-13	13	3640	Stück · <i>piece</i>	15,6	965318
9652141	VAO 490-14	14	3920	Stück · <i>piece</i>	16,8	965325
9652151	VAO 490-15	15	4200	Stück · <i>piece</i>	18,0	965332