

Steigleitern ohne Rücken-/Steigschutz

Grundkonfiguration nach DIN 18799

Vertical ladders without fall arresting system

Basic configuration according to DIN 18799

DE

Ausführung:

Einzügig gemäß den Grundanforderungen der DIN 18799, inkl. aller Systemkomponenten, ohne Befestigungsmittel.

Achtung!

Eine gerade Befestigungsfläche ohne Hindernisse wird vorausgesetzt. Bei Steigleitern an Gebäuden Steig-/Rückenschutz ab 5000 mm – bei Steigleitern an maschinellen Anlagen ab 3000 mm – Steighöhe erforderlich!

Lieferumfang:

Leiterteile, Leiterverbinder, Leiterkappen, Wandhalter 165 mm, Ausstiegsholmbügel Typ AHB-K, Austrittsverlängerung.

Maximale Versandlänge: 4200 mm. Teile über 4200 mm Länge mehrteilig.

GB

Explanation:

Single-flight according to the basic requirements of DIN 18799, including all system components, without fixtures.


Attention!

Straight mounting surface required. Fall arresting system/safety cage required: for fixed ladders on buildings from a climbing height of 5000 mm – on machinery from 3000 mm!

Scope of delivery:

Ladder parts, ladder connectors, ladder caps, wall brackets 165 mm, exit rails type AHB-K, exit extension.

Maximum shipping length 4200 mm. Parts of more than 4200 mm length are delivered in several parts.

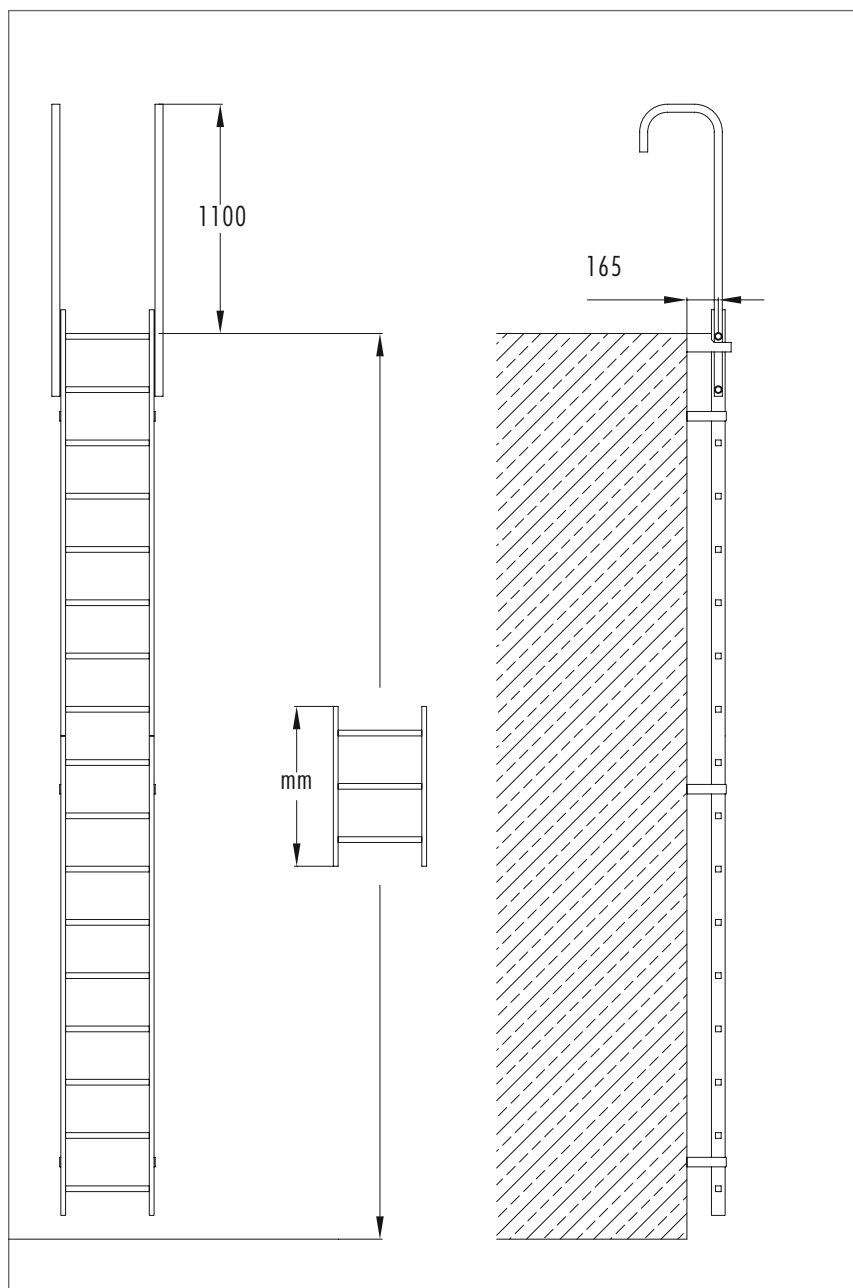

Steigleitern ohne Rücken-/Steigschutz Typ ALO / STO / VAO

Vertical ladders excl. rear safety cage/fall arrest system type ALO/STO/VAO

Material:
Aluminium + Stahl / Steel

Oberfläche: ALUNAT, natur + Stahl feuerverzinkt
Surface: ALUNAT, uncoated + steel hot dip galvanized

Artikel-Nr. Item no.	Typ Type					 4007126 ...
6047113	ALO-11	11	3080	Stück · piece	21,2	010506
6047123	ALO-12	12	3360	Stück · piece	21,8	010513
6047133	ALO-13	13	3640	Stück · piece	22,4	010520
6047143	ALO-14	14	3920	Stück · piece	22,9	010537
6047153	ALO-15	15	4200	Stück · piece	23,3	010544
6047163	ALO-16	16	4480	Stück · piece	24,5	010551
6047173	ALO-17	17	4760	Stück · piece	25,0	010568
6047183	ALO-18	18	5040	Stück · piece	27,3	010575

Material:
Stahl / Steel 1.0037/ASTM A36

Oberfläche: feuerverzinkt
Surface: hot dip galvanized

Artikel-Nr. Item no.	Typ Type					 4007126 ...
9647113	STO-11	11	3080	Stück · piece	35,1	011268
9647123	STO-12	12	3360	Stück · piece	36,3	011275
9647133	STO-13	13	3640	Stück · piece	37,5	011282
9647143	STO-14	14	3920	Stück · piece	38,7	011299
9647153	STO-15	15	4200	Stück · piece	40,0	011909
9647163	STO-16	16	4480	Stück · piece	42,0	011916
9647173	STO-17	17	4760	Stück · piece	43,2	011923
9647183	STO-18	18	5040	Stück · piece	46,2	011930

Material:
Edelstahl / Stainless steel
1.4301 / ASTM 304

Oberfläche: gebeizt und passiviert
Surface: pickled and passivated

Artikel-Nr. Item no.	Typ Type					 4007126 ...
9652113	VAO-11	11	3080	Stück · piece	34,9	011947
9652123	VAO-12	12	3360	Stück · piece	36,1	011954
9652133	VAO-13	13	3640	Stück · piece	37,3	011961
9652143	VAO-14	14	3920	Stück · piece	38,5	011978
9652153	VAO-15	15	4200	Stück · piece	39,7	011985
9652163	VAO-16	16	4480	Stück · piece	41,8	011992
9652173	VAO-17	17	4760	Stück · piece	43,0	012609
9652183	VAO-18	18	5040	Stück · piece	46,0	012616