

Schachtabdeckung aus Edelstahl, Typ HS8 ECO

Shaft cover in stainless steel, type HS8 ECO

Rechteckige Ausführung, tagwasserdicht, befahrbar, geruchssicher, zum ebenerdigen Einbau
Rectangular design, surface water proof, safe to drive on, odour proof, for installation at ground level

DE

Material: Edelstahl 1.4301/ASTM 304

Nur für verkehrsberuhigte Bereiche — nicht für fließenden Verkehr

Belastungsklassen:

Klasse D nach EN124

Ausführung:

Bodengleich, mit verdeckt liegenden Scharnieren und selbststeinfallender Feststelleinrichtung sowie Gasdruckfeder als Öffnungshilfe

Verriegelung:

Schraubverschluss mit Messingschrauben für Hakenschlüssel; vorbereitet für Sicherheitsprofilzylinder

Zulage:

· Material: 1.4571/ASTM 316 ti (V4A) als Zulage

GB

Material: Stainless steel 1.4301/ASTM 304

For traffic-calming zones only — not for moving traffic

Load classes:

Class D in accordance with DIN EN 124

Design:


Flush with ground, with concealed hinges and self-aligning positioning mechanism and gas-pressurised spring as opening aid

Locking:

Locked by means of screws with brass screw for hook key, prepared for safety profile cylinder

At additional cost:

· Material: 1.4571/ASTM 316 ti (V4A) at extra cost

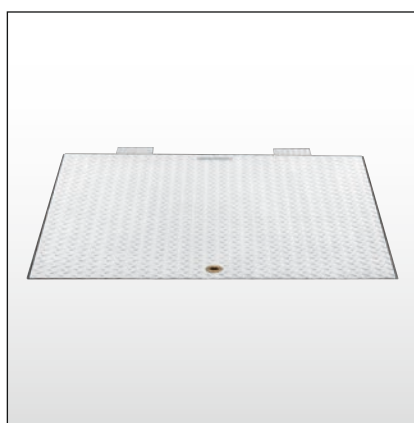



Gewährleistung 5 Jahre: Dichtungsmaterialien unterliegen dem natürlichen Verschleiß und sind von der Gewährleistung ausgeschlossen.

5-year warranty: Sealing materials are subject to natural wear and tear and are excluded from the warranty.

Schachtabdeckung aus Edelstahl, Typ HS8 ECO

Shaft cover in stainless steel, type HS8 ECO

Rechteckige Ausführung, tagwasserdicht, befahrbar, geruchssicher, zum ebenerdigen Einbau
Rectangular design, surface water proof, safe to drive on, odour proof, for installation at ground level

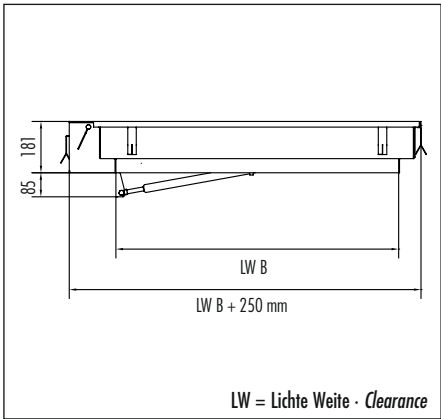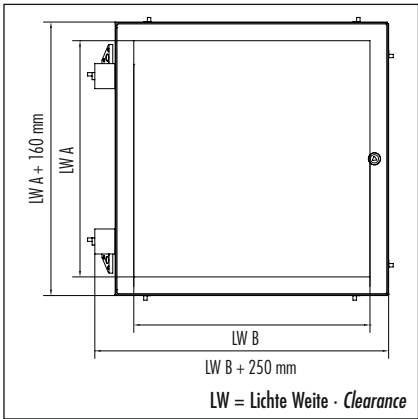

Artikel-Nr. Item no.	Ausführung Design	A x B			 4007126 ...
9544002	Befahrbar Klasse D 400 kN · Safe to drive on — load class D 400 kN	600 x 600 mm	Stück · piece	79,0	046864
9544004	Befahrbar Klasse D 400 kN · Safe to drive on — load class D 400 kN	800 x 800 mm	Stück · piece	130,0	046871
9559921	Befahrbar Klasse D 400 kN · Safe to drive on — load class D 400 kN	1000 x 1000 mm	Stück · piece	180,0	046888
9554241	Befahrbar Klasse D 400 kN · Safe to drive on — load class D 400 kN	1200 x 1200 mm	Stück · piece	237,5	046895
9515181	Bedienschlüssel · Operator key		Stück · piece	0,8	046420
9515011	Sicherheitsschloss · Security lock		Stück · piece	0,4	046550
1065389	Messingzylinder ohne Schlosseinsatz · Brass cylinder without lock insert		Stück · piece	0,2	042675